

ROOF ACCESS LADDER

SEMI-ILLUSTRATED FITTING MANUAL




You will need:

- General workshop tools
- Drill

Installation Procedure

1. Remove the two bolts as directed in image shown.
2. Fit the edging seals provided at the top end of the ladder.
3. Locate the ladder in its correct position top and bottom, making sure that the ladder is vertically straight.
4. Fit the two lower bolts to hold the ladder in place.
5. Drill two holes in the roof where the holes in the top section of the ladder meet the roof. Fit the top bolts. Ensure that the large washers are located inside the wall of the roof skin.
6. Tighten all bolts securely.

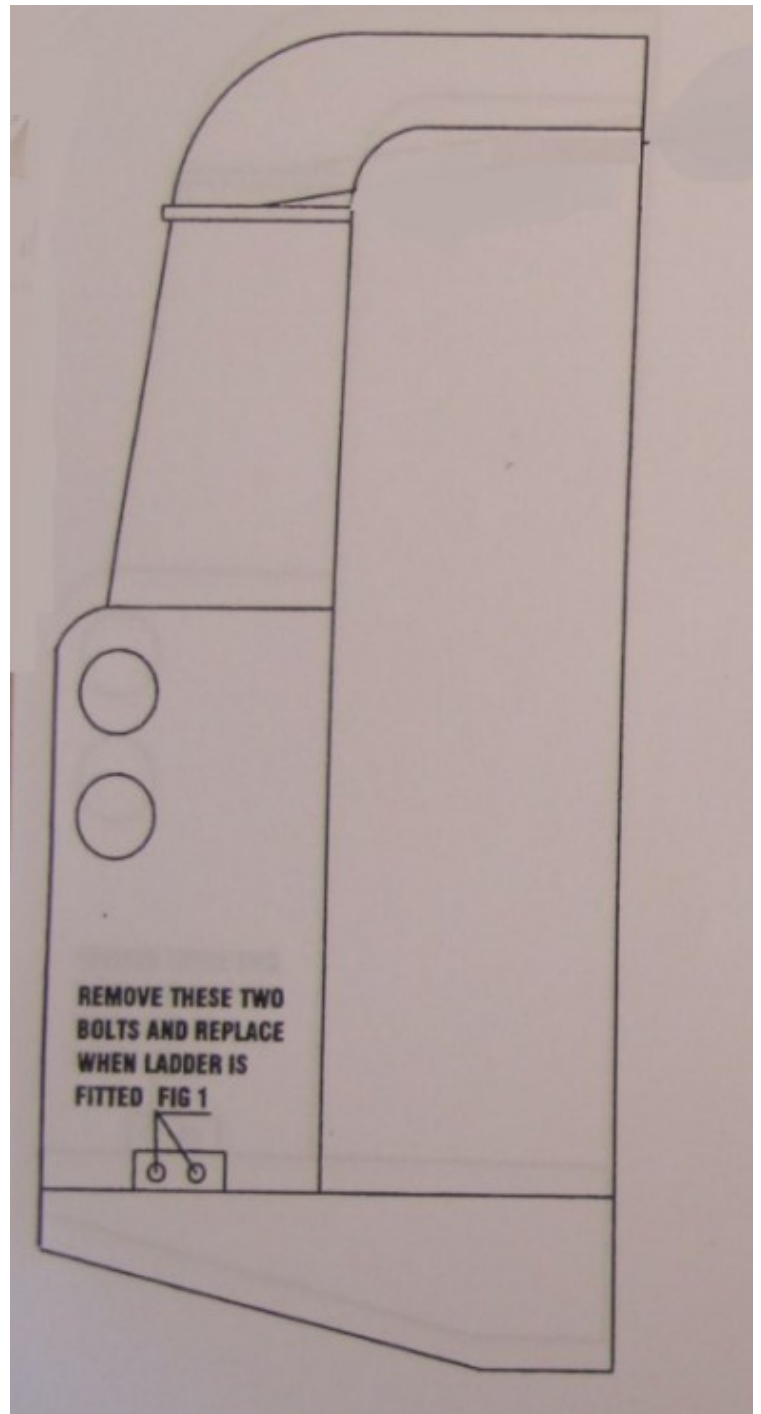

Customer Feedback

Your feedback is very important to us.


We would love to hear any suggestions or recommendations you may have about the Masai product range. If you have any feedback you think may help us improve the services or products we offer, then please use the details found on the reverse page of this booklet to contact us.

Thank you for choosing Masai.





Unit 5, Eastern Park, Eastern Avenue, Lichfield,
Staffordshire, WS13 7SY. United Kingdom.
Tel: +44(0)1543-254507 Fax: +44(0)1543-418665
Email: info@masai.co

www.masai  **.co**