

LUGGAGE AND FLAT ROOF RACKS

ILLUSTRATED FITTING MANUAL



You will need:

- General workshop tools
- Step ladders
- A friend to help you lift the roof rack

LUGGAGE AND FLAT ROOF RACKS

Thank you for purchasing this Masai roof rack. Please read these instructions carefully before commencing work. This manual illustrates the fitting of a luggage roof rack, but the same process is applicable to our flat roof rack.

Make sure you have all the tools and other equipment ready before you start, including a table near your vehicle. Please follow widely accepted safety precautions.

In addition to bolts, nuts, washers and rubber pads, your kit should include:




Side panels x2 – 2800, 2150 or 1500



Front/back panels x2



Radius corners x8 (4x for the Flat Roof Racks)

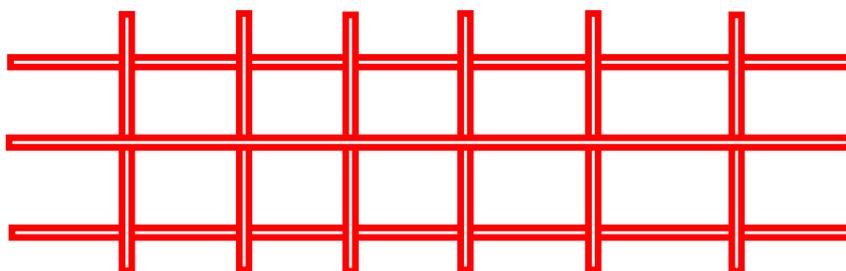

Width Crossbars

x6 for 2800mm Roof Rack
x5 for 2150mm Roof Rack
x3 for 1500mm Roof Rack

Front to back Crossbars

x3 for 2800, 2150 or 1500



Legs — x12 for 2800, x6 for 2150, x4 for 1500




Side panels for flat roof rack only — x 2 for 2800, 2150 or 1500



1. Fix the corner pieces to the side panels using the long bolts.



2. Assemble the crossbars running lengthways once the frame has been built.

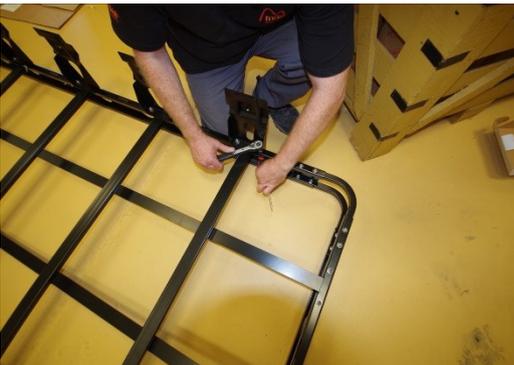


3. Assemble the leg brackets, crossbars and side panels as shown. Usually, the legs will sit flush with the side panel, but the oblong hole on the leg bracket allows you to adjust the position if necessary.



4. Your roof rack should now look something like this. The light bar and spotlights have been added for display purposes only - if you intend to add any accessories to your roof rack, this is an ideal time to do it.



5. Push a protective rubber pad onto each of the legs and use the foam material provided with the packaging to line the underside of the brackets.

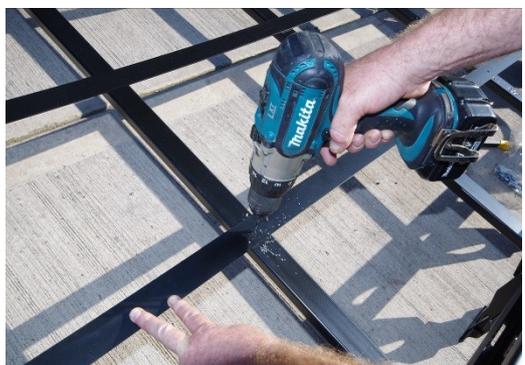

6. The crossbar intersections need to be riveted. In each intersection, drill an appropriately sized hole for the rivets you have chosen to use.



7. Using a pop rivet gun, insert one rivet into every crossbar intersection.




8. Your roof rack should now be complete. Carefully lift it on to your vehicle.



9. Lift the roof rack onto the vehicle and fasten the brackets. The brackets fit around the outside of the guttering and the legs slot inside the gutter itself. In some cases, the protective material under the brackets can obstruct the opening of the doors. If this occurs, simply remove this material or adjust the position of the door.

PERSONAL NOTES

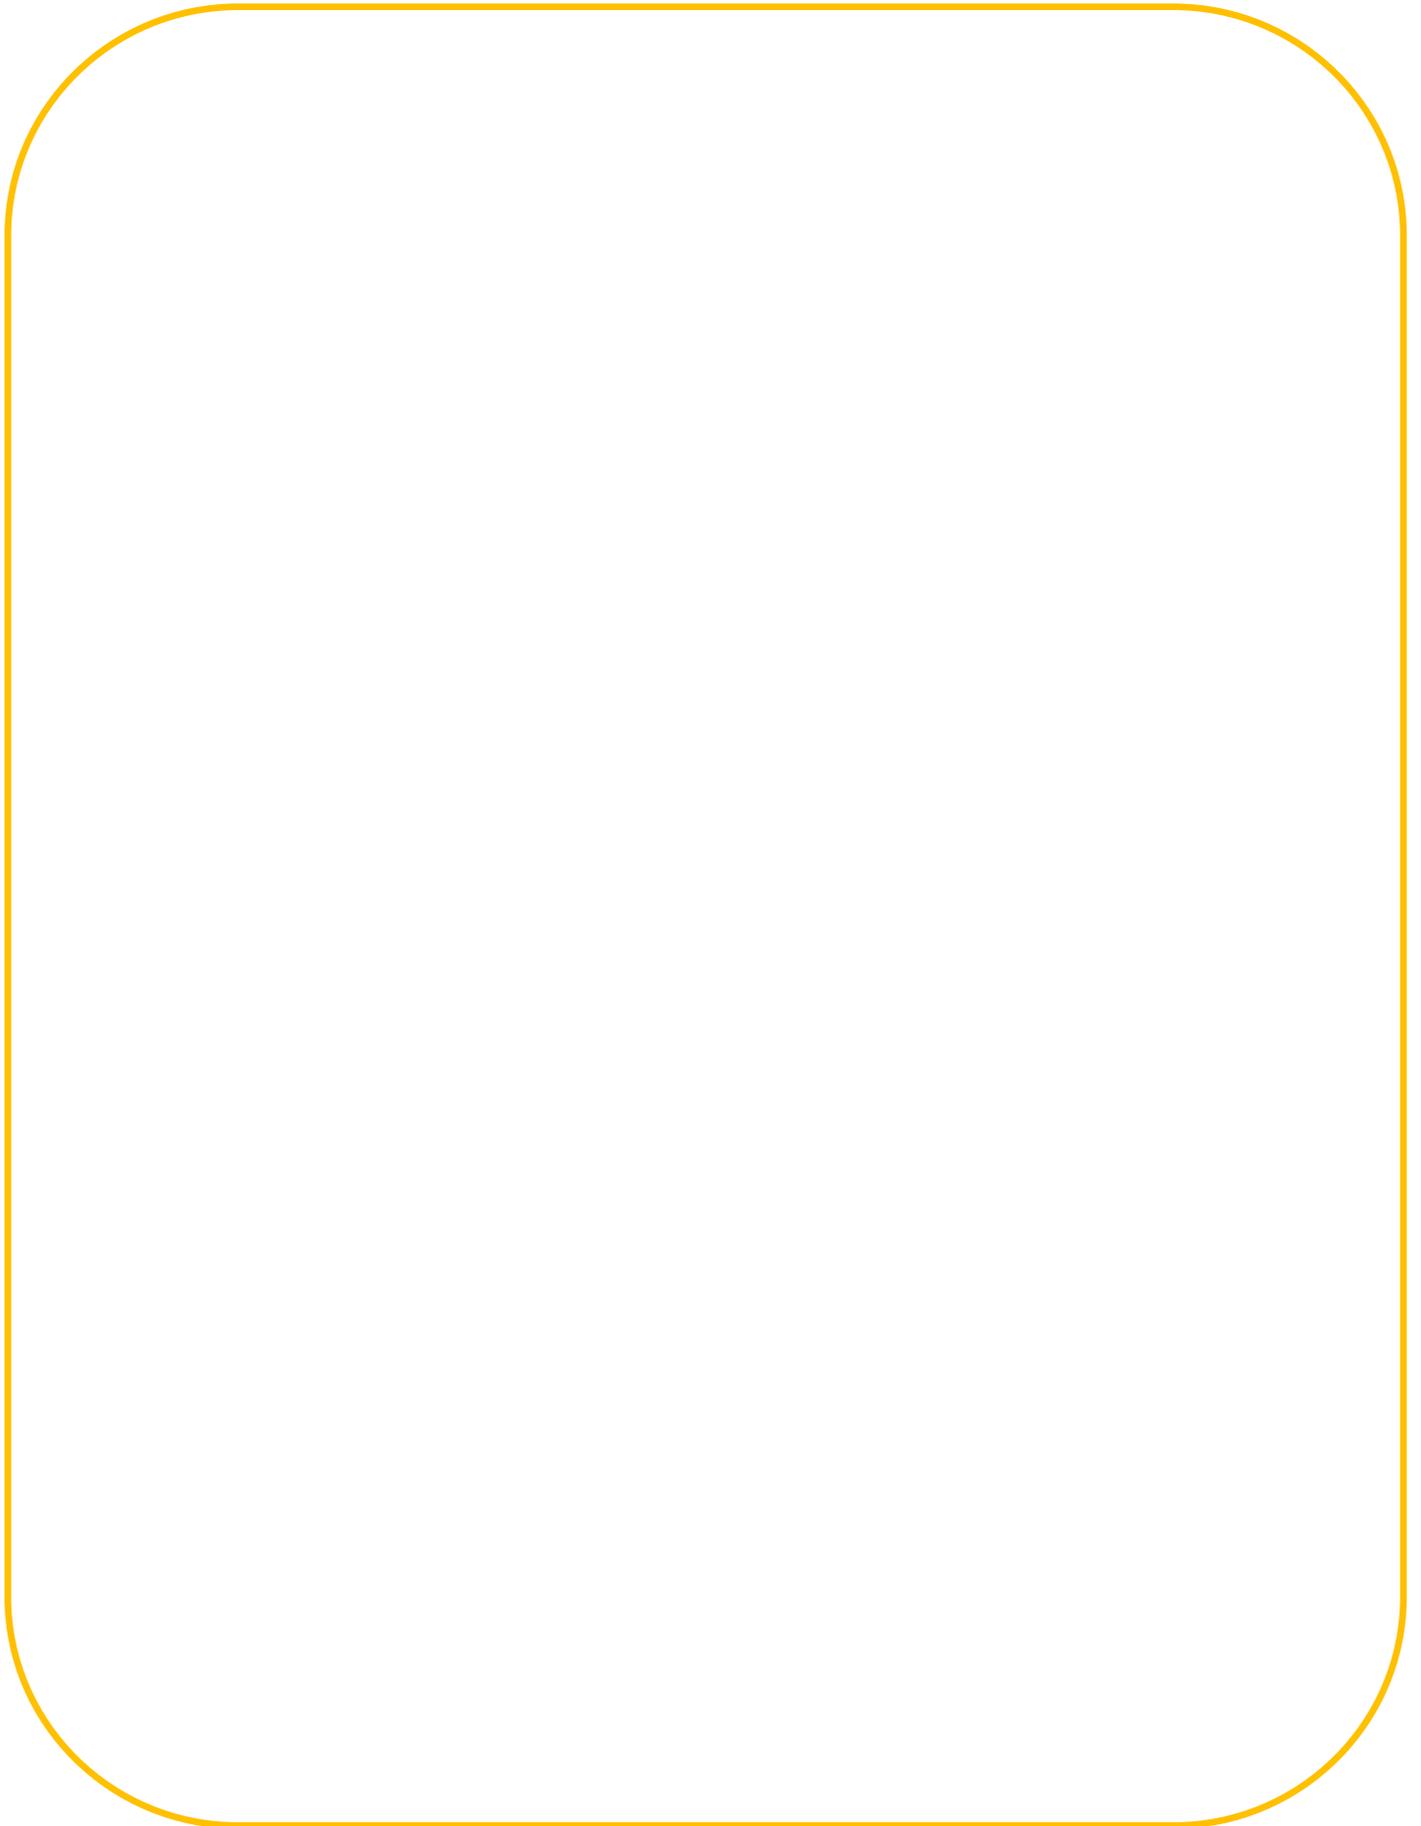

PERSONAL NOTES

A large, empty rounded rectangular box with a yellow border, intended for personal notes. The box is centered on the page and occupies most of the vertical space below the header.

Customer Feedback

Your feedback is very important to us.

We would love to hear any suggestions or recommendations you may have about the Masai product range. If you have any feedback you think may help us improve the services or products we offer, then please use the details found on the reverse page of this booklet to contact us.

Thank you for choosing Masai.





Unit 5, Eastern Park, Eastern Avenue, Lichfield,
Staffordshire, WS13 7SY. United Kingdom.
Tel: +44(0)1543-254507 Fax: +44(0)1543-418665
Email: info@masai.co

www.masai **.co**