

ROOF ACCESS LADDER

SEMI-ILLUSTRATED FITTING MANUAL




You will need:

- General workshop tools
- Drill

Installation Procedure

1. Remove the two bolts as directed in image shown.
2. Locate the ladder in its correct position top and bottom, making sure that the ladder is vertically straight.
3. Fit the two lower bolts to hold the ladder in place as in figure 1.
4. Drill two holes in the roof and tub rail, where the holes in the top section of the ladder meet the roof. Fit the top bolts and tub rail bolts. Ensure that the large washers are located inside the wall of the roof skin.
5. Tighten all bolts securely.
6. Tighten the Clamp Bolt as necessary.

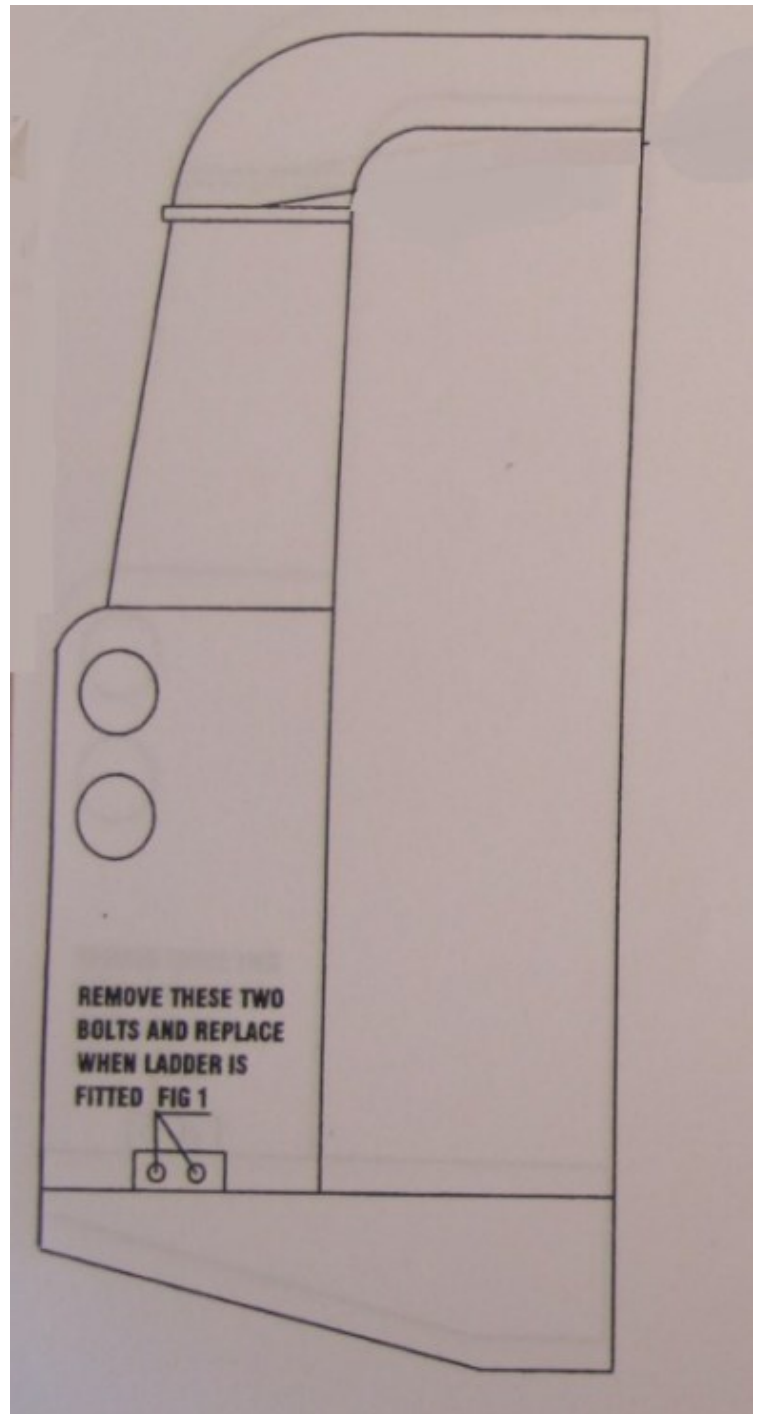

Customer Feedback

Your feedback is very important to us.

We would love to hear any suggestions or recommendations you may have about the Masai product range. If you have any feedback you think may help us improve the services or products we offer, then please use the details found on the reverse page of this booklet to contact us.

Thank you for choosing Masai.





Unit 5, Eastern Park, Eastern Avenue, Lichfield,
Staffordshire, WS13 7SY. United Kingdom.
Tel: +44(0)1543-254507 Fax: +44(0)1543-418665
Email: info@masai.co

www.masai  **.co**