

## Mini Seat Cover Fitting Instructions



Thank you for purchasing our Mini Seat Covers. Please read these instructions carefully. If you do not feel confident to fit these seat covers yourself, we also provide a fitting service - just call for a quote. You can fit these seat covers to your Mini in just a couple hours. We recommend the following steps.

- 1.** Remove all the seats from your vehicle
- 2.** Remove the old seat covers carefully without damaging the foam material
- 3.** Try the new seat covers on to your seats to ensure that you are happy with the shape and fitment to your car seats.

**4.** If you are happy with the fit, remove and turn inside out ready to apply the glue (contact adhesive).

**5.** Apply the glue all over the inside of the upper seat cover – follow the instructions on the glue container.




**6.** Apply the glue on to the upper seat foam in the areas which are to be attached to the seat cover.




**7.** When the glue on both applied surfaces no longer feels sticky, carefully align them together as accurately as possible and attach. The adhesion should be firm by now.



- 8.** Pull the strings through the foam and pull tight so the seat cover is fully stretched. Knot the ends of the strings on the back of seat frame.

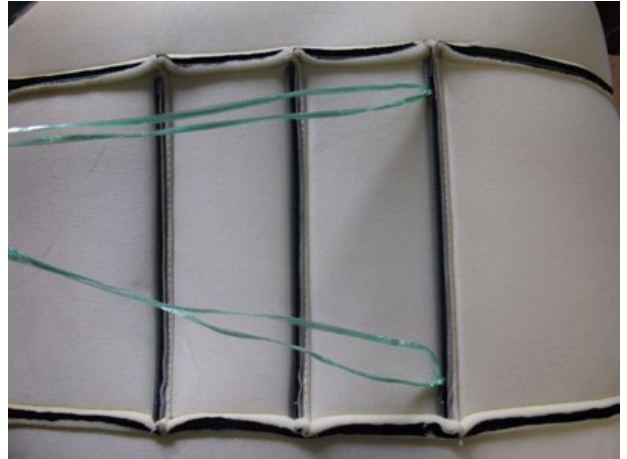

- 9.** Continue to wrap the cover onto the car seat. Press the glue applied area to ensure a firm bonding and to ensure a neatly formed shape.

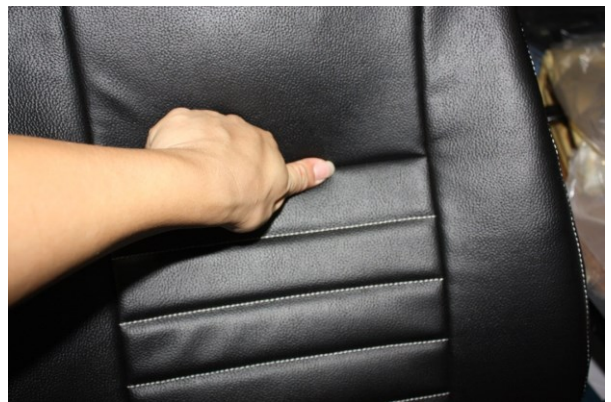

- 10.** Repeat these steps on the base section of the seat.

- 11.** Use the C-hooks on the base unit to tie the seat covers underneath the seat frame where necessary.



- 12.** On the base of the front seats use the rubber trim to clip the seat covers underneath of the seat frame.

- 13.** You can now assemble the seats on to your vehicle.

