





Land Rover Defender Seat Cover Fitting Instructions

Thank you for purchasing our Masai Land Rover Seat Covers. Please read these instructions carefully. If you do not feel confident to fit these seat covers yourself, we also provide a fitting service - just call for a quote.

You can fit Masai Seat Covers to your Defender in just a few hours. We recommend the following steps to fit the seat covers.

1. Remove the old seat covers carefully without damaging the foam.
2. Try the new seat covers on to your seats to ensure that you are happy with the shape and fitment.
3. If you are happy with the fit, remove and turn inside out ready to apply the glue.
4. Apply the glue along the whole length of the green strips on the back of the seat covers.
5. Leave to dry - at least 80% dry when the glue would not stick to hand when touched.
6. Apply the glue to the foam of the seat area, which is to be attached to the green strips on the seat covers. Leave to dry 80%.

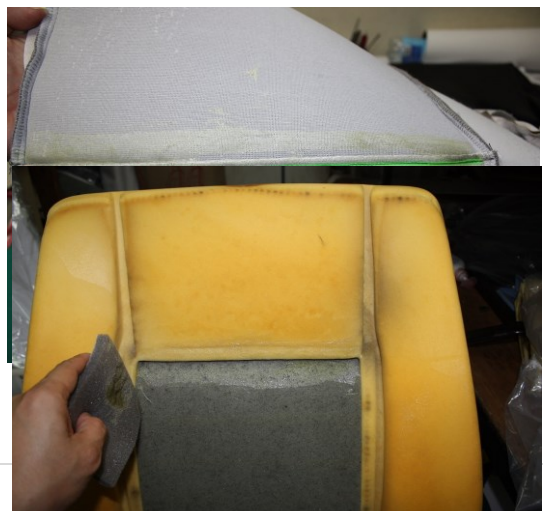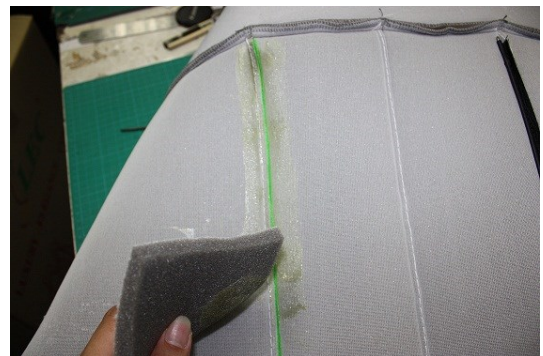

7. When the glue of both applied surfaces does not feel sticky, carefully align together as accurately as possible and attach. The adhesion should now be firm by now.
8. Continue to wrap the seat cover onto the car seat. Press on to the glue applied area to ensure a firm bonding and so the shape forms nicely.
9. Repeat the steps on the seated car seat portion.
10. Please see last photo for the final appearance after installation.

