

FRONT LAMP GUARDS

SEMI-ILLUSTRATED FITTING MANUAL




You will need:

- General workshop tools
- Drill

Installation

Our lamp guards are simple to fit. Hold the lamp guard up to the front of your vehicle and create pilot holes using a 3mm drill bit before fitting the screws. Repeat this process on the other side of the vehicle.

These lamp guards are zinc coated before they are powder coated. We recommend regular cleaning to maintain the quality of the finish.

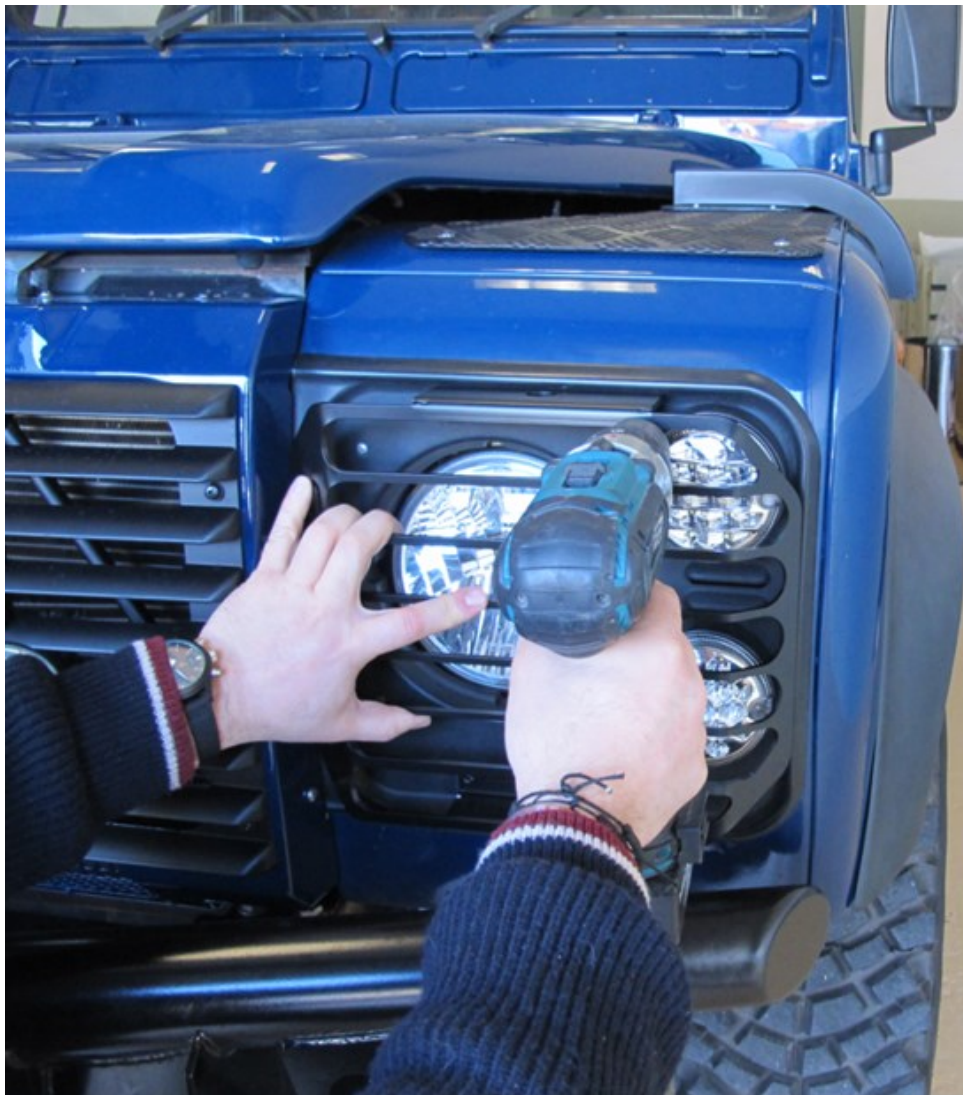

Customer Feedback

Your feedback is very important to us.


We would love to hear any suggestions or recommendations you may have about the Masai product range. If you have any feedback you think may help us improve the services or products we offer, then please use the details found on the reverse page of this booklet to contact us.

Thank you for choosing Masai.





Unit 5, Eastern Park, Eastern Avenue, Lichfield,
Staffordshire, WS13 7SY. United Kingdom.
Tel: +44(0)1543-254507 Fax: +44(0)1543-418665
Email: info@masai.co

www.masai  **.co**